



Twilight Zone Rocket Installation Instructions

Use care not to break off the flame as there is no good way to re-attach it.

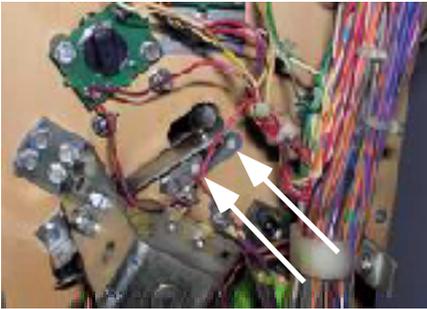

Raise the playfield to the full vertical position. Take care not to have the balls fall and damage anything. Remove two screws from the right end of rocket ball kicker bracket and rotate the kicker clockwise down.

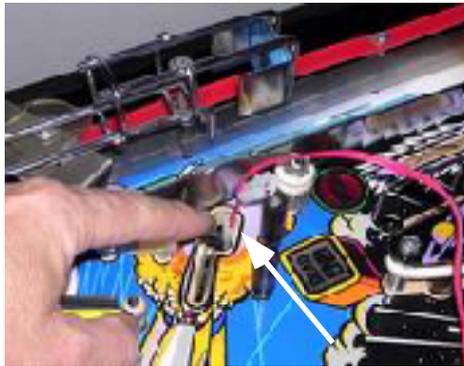

Bring the playfield down to the rests and remove the plastic and ball guide. The rocket is mounted to its own plastic that will be installed over the rocket plastic. Feed the wire plugs through the kicker hole holding the kicker to the left with a finger. Feed nearly all the wire through the hole.



Put the ball guide back and feed the wire behind it. Re-install the rocket plastic with the new rocket plastic on top. Adjust the ball guide and route the wire so it stays behind the guide and up out of the way of the ball. The wire should enter the right side of the hole so the kicker won't hit it. See the next picture too.




Locate wire out of ball path.

Rocket mounted on the clear plastic with screw and nylon mount. Put on top of the rocket plastic. The wire should be kept tight under the plastic and behind the metal ball guide.



Raise the playfield to the full vertical position again. Re-install the two rocket ball kicker screws. Ty-wrap the the wire from the rocket to the bundle as in the picture and adjust it so the wire stays against the upper side of the hole and away from the kicker arm.

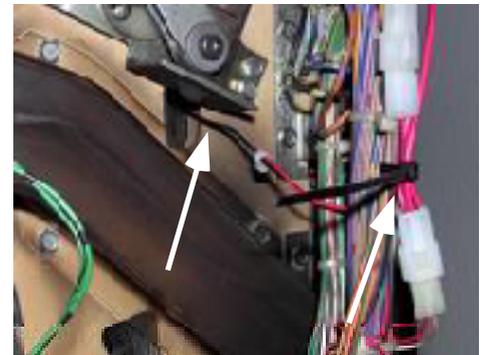

Locate the red and black pair of wires coming from a flash lamp just above (down with the playfield up) the rocket kicker. It is attached under a blue plastic. The wires have a two pin plug on them. Disconnect the two pin plug and carefully connect the rocket connectors to the disconnected connectors. Ty-wrap the rocket wire to the bundle to secure the connectors and wiring.

Lower the playfield and make any final adjustments to the rocket wiring and the position of the rocket. Use care not to break off the Rocket Flame as there is no good way to re-attach it. Test run the game before putting the glass back on to be sure the wires are out of the way of the ball and the angle of the ball guide is ok. You should see the rocket flame lighting with the flasher.